

**Gr2 pure titanium tube stock list**

No.	Specification	Pcs	Weight (kg)	No.	Specification	Pcs	Weight (kg)	No.	Specification	Pcs	Weight (kg)
1	Φ6*0.5		105	23	Φ28*3.5		222	45	Φ50*0.8		228
2	Φ9.5*0.5		338	24	Φ28*5		16.6	46	Φ50*1		250
3	Φ12.7*1.5		128	25	Φ32*1		12	47	Φ50*3		115
4	Φ13*0.9		200.5	26	Φ32*1.2		55	48	Φ51*1		65
5	Φ15*1		185	27	Φ32*1.5		134	49	Φ57*3		440
6	Φ15*1.2		204	28	Φ32*2		500	50	Φ60*1		22
7	Φ16*1		150	29	Φ32*2.5	3	12.6	51	Φ60*2.5	4	24
8	Φ16*1.5		35	30	Φ32*3		335	52	Φ63*1.5		43
9	Φ19*1		54.6	31	Φ32*4		128	53	Φ76*1.5		25
10	Φ19*2		30	32	Φ33*1.5	3	12	54	Φ89*2		76
11	Φ20*1.2		49	33	Φ34*2	6	14	55	Φ89*3		454
12	Φ20*2		115	34	Φ38*1	3	12.5	56	Φ108*3		440
13	Φ21*3		100	35	Φ38*1.5		15	57	Φ108*4		900
14	Φ21*4		15	36	Φ38*2		122				
15	Φ22*1.2		665	37	Φ38*2.5	5	26				
16	Φ25*1		258	38	Φ38*3		266				
17	Φ25*1.2		138	39	Φ42*3		400				
18	Φ25*1.5		255	40	Φ45*1.2		32				
19	Φ25.5*3		4.6	41	Φ45*1.5		65				
20	Φ25.5*4		6	42	Φ45*2	44	312				
21	Φ27*1.5		224	43	Φ48*1.5	1	224				
22	Φ27*3.5		100	44	Φ48*3		335				

Contact:

Anber

Email:

anber@bjhighstar.com

Whatsapp:

+86 15034001015

Pure titanium/titanium alloy bar stock list

GR2 titanium bar						GR5 titanium bar		
No.	Specification	Weight (kg)	No.	Specification	Weight (kg)	No.	Specification	Weight (kg)
1	Φ3*3000mm	27kg	22			1	Φ6*3000mm	450kg
2	Φ4*3000mm	24kg	23			2	Φ8*3000mm	53.3kg
3	Φ8*3000mm	55kg	24			3	Φ10*3000mm	128.4kg
4	Φ12*3000mm	80kg	25			4	Φ13*3000mm	359.6kg
5	Φ14*3000mm	335kg	26			5	Φ14*3000mm	409.9kg
6	Φ16*3000mm	80kg	27			6	Φ15*3000mm	225kg
7	Φ35*3000mm	65kg	28			7	Φ17*3000mm	344.5kg
8	Φ35*2000-3000mm	150kg	29			8	Φ20*3000mm	80kg
9	Φ40*3000mm	500kg	30			9	Φ24*3000mm	112.5kg
10	Φ50*3000mm	300kg	31			10	Φ26*3000mm	120.4kg
11	Φ55*3000mm	335kg	32			11	Φ35*3000mm	90kg
12	Φ60*3000mm	440kg	33			12	Φ50*3000mm	152kg
13	Φ65*3000mm	550kg	34			13	Φ60*3000mm	166.3kg
14	Φ70*3000mm	100kg	35			14	Φ80*3000mm	178.5kg
15	Φ80*3000mm	450kg	36					
16	Φ100*3000mm	500kg	37					
17			38					
18			39					
19			40					
20			41					
21			42					

Titanium plate/sheet stock list

GR2			GR5			GR12		
No.	Specification	Weight (kg)	No.	Specification	Weight (kg)	No.	Specification	Weight (kg)
1	0.8*1000*2000	226kg	1	0.8*>1000*>2000	230kg	1	1.0*1000*2000	650kg
2	1.0*1000*2000	353kg	2	1.0*>1000*>2000	306kg	2	2.0*1000*2000	556kg
3	1.2*1000*2000	450kg	3	1.2*>1000*>2000	95kg	3	3.0*1000*2000	1010kg
4	1.5*1000*2000	50kg	4	1.5*>1000*>2000	85kg	4	4.0*1000*2000	285kg
5	1.6*1000*2000	650kg	5	2.0*>1000*>2000	115kg	5	5.0*1000*2000	488kg
6	2.0*1000*2000	468kg	6	3.0*>1000*>2000	105kg	6	6.0*1000*2000	225kg
7	3.0*1000*2000	345kg	7	4.0*>1000*>2000	205kg	7	8.0*1000*2000	348kg
8	4.0*1000*2000	90kg	8	5.0*>1000*>2000	113kg	8	10.0*1000*2000	550kg
9	5.0*1000*2000	85kg	9	6.0*>1000*>2000	185kg	9		
10	5.5*>1000*?2000	225kg	10	7.0*>1000*>2000	205kg	10		
11	6.0*>1000*>2000	335kg	11	8.0*>1000*>2000	302kg	11		
12	6.5*>1000*>2000	450kg	12	10*>1000*>2000	153kg	12		
13	7.0*>1000*>2000	120kg	13	12*>1000*>2000	88.5kg	13		
14	8.0*>1000*>2000	205kg	14	18*>1000*>2000	95kg	14		
15	9.0*>1000*>2000	305kg	15	20*>1000*>2000	95.8kg	15		
16	10*>1000*>2000	108kg	16	22*>1000*>2000	0kg	16		
17	15*>1000*>2000	116kg	17	25*>1000*>2000	86.5kg	17		
18	18*>1000*>2000	95.5kg	18	30*>1000*>2000	285kg	18		
19	24*>1000*>2000	252kg	19	40*>1000*>2000	226kg	19		
20	35*>1000*>2000	254kg	20	45*>1000*>2000	95kg	20		
21			21	50*>1000*>2000	133kg	21		



Titanium cathode

Detailed information of Titanium cathode type:

Titanium mesh/titanium plate/titanium wire/titanium Component..

Detailed information of titanium cathode coating:

No.	Coating	Reverse use	Chloride ion concentration	Type
HS180208	Ru-Ir	Poor effect	>5000ppm	Plate/mash/Component...
HS180211	Ir-Ta	No	<2000ppm	
HS180219	PbO2	No	<200ppm only plating,not coating	
HS180224	Platinum	Good effect	-	

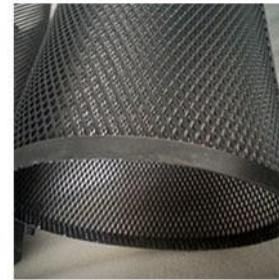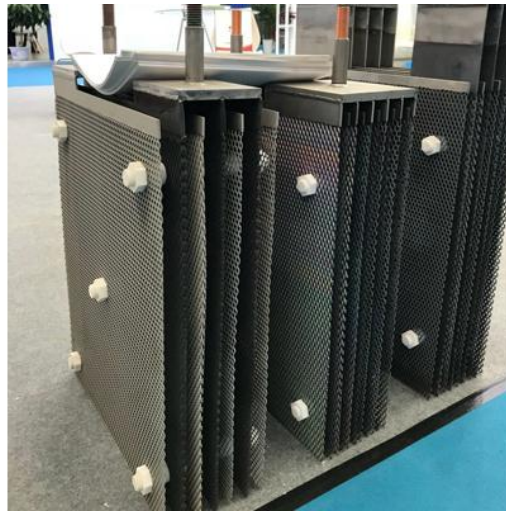

Titanium sintered/filter

Titanium sintered/filter plate

Length: 5 mm - 300 mm (can be customized according to requirements) Thickness: 0.5 mm - 10 mm (other specifications can be processed according to the requirements)

Filtration precision: 0.5 um - 160 um


Titanium filter tube

Diameter: Φ 20 mm - 200 mm (can be customized according to requirements) Length: L100mm - L1200mm (can be customized according to requirements) Thickness: above 1 mm (other specifications can be processed according to the requirements)

Filtration precision: 0.5 um - 160 um

Filter accuracy	porosity	<u>penetrability</u>	<u>compression strength</u>	<u>temperature toleration</u>	Maximum working pressure
0.5um-80um	20-50%	3-800m ³ /m ³ h Pa	2-3Mpa	250℃	0.6Mpa

Filter accuracy	porosity	<u>penetrability</u>	<u>compression strength</u>	<u>temperature toleration</u>	Maximum working pressure
0.5um-80um	20-50%	3-800m ³ /m ³ h Pa	2-3Mpa	250℃	0.6Mpa

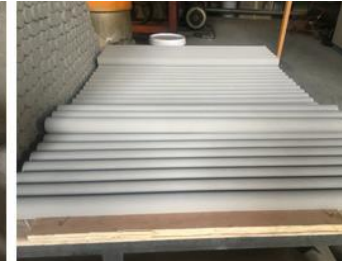

Contact: Anber
Email: anber@bjhighstar.com
Whatsapp: 8615034001015